




StripAid™ X Series Specialty Solvent

Typical Physical Properties

	Value
Specific Gravity @ 68°F	0.97
Density @ 68°F, lbs/gallon	8.1
Solubility in Water	Negligible
Water Solubility in Strip Aid @25°C, % by weight	0.2
Absolute Viscosity 68°F, cSt	55
Flash Point, °C	212
Vapor Pressure	Negligible
Color	Cloudy
Odor	Mild

Application

StripAid is specially formulated to remove WaferGrip Temporary adhesives. The following are recommended process steps.

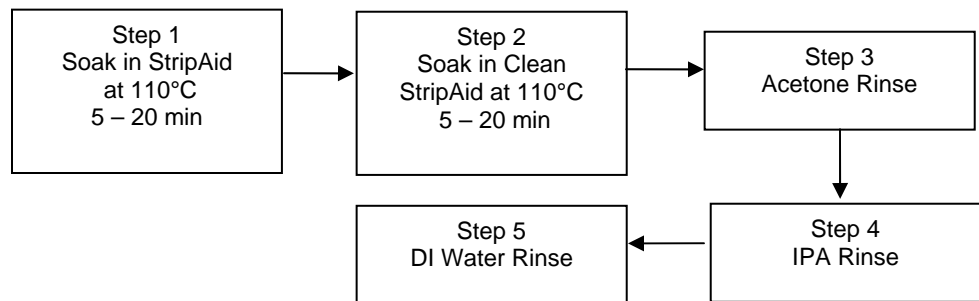

Safety

Because StripAid has a low order of toxicity, it does not require special handling. Always use good industrial hygiene and safety practices. See the StripAid MSDS for complete safety, handling, storage and disposal information.

Storage

StripAid should be stored away from direct sunlight. Proper storage temperatures range from 20 C to 25 C. Do not store under freezing conditions.

Although the information and recommendations set forth herein are presented in good faith and believed to be correct, Dynatex International makes no representations as to their completeness or accuracy. Information is supplied upon the condition that the persons receiving will make their own verification and determination as to its suitability for their purposes prior to use. In no event will Dynatex International be responsible for damages of any nature whatsoever resulting from the use of or reliance upon this information. NO REPRESENTATION OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR PRODUCT TO WHICH INFORMATION REFERS.



5577 Skylane Boulevard
Santa Rosa, CA 95403
Phone: 707.542.4227
Fax: 707.579.8599
www.dynatex.com
sales@dynatex.com